

# OD-CP093xSL1001

## 10Gbps SFP Transceiver 10km



### 1. Features

- 1310nm DFB transmitter and PIN receiver
- Lead-Free and RoHS Compliant
- 10.3125Gbps Data Rate
- 2-wire interface with integrated Digital Diagnostic monitoring
- Up to 10km on 9/125 $\mu$ m SMF (ITU-T G.652)
- Hot-pluggable SFP+ electrical interface
- Duplex LC type pluggable optical interface
- Loss of Signal (LOS) function
- Transmitter disable (TX\_DISABLE) function
- Single +3.3V power supply

Applications  
10G BASE-LR

## 2. Product Number Information

| Part Number     | Fiber Optical Connector | Latch structure | Tx wavelength | Case Temperature |
|-----------------|-------------------------|-----------------|---------------|------------------|
| OD-CP0931SL1001 | LC                      | Bail Latch      | 1.31μm band   | -40 to +85 deg.C |

## 3. Absolute Maximum Ratings

| Parameter                          | Unit  | Specification |      |     | Notes |
|------------------------------------|-------|---------------|------|-----|-------|
|                                    |       | Min           | Typ. | Max |       |
| Storage Temperature                | deg.C | -40           |      | +85 |       |
| Supply Voltage (VccT, VccR)        | V     | -0.5          |      | 3.6 |       |
| Relative Humidity (non-condensing) | %     | 5             |      | 85  |       |
| Damage Threshold                   | dBm   | 5             |      |     |       |

## 4. Operating Conditions

| Parameter                  | Unit  | Min.  | Typ.    | Max.  | Notes               |
|----------------------------|-------|-------|---------|-------|---------------------|
| Operating Case Temperature | deg.C | -40   |         | 85    |                     |
| Power supply Voltage (Vcc) | V     | 3.135 | 3.3     | 3.465 |                     |
| Data Rate                  | Gbps  |       | 10.3125 |       |                     |
| Control Input Voltage High | V     | 2     |         | Vcc   |                     |
| Control Input Voltage Low  | V     | 0     |         | 0.8   |                     |
| Link Distance (SMF)        | km    |       |         | 10    | 9/125um ITU-T G.652 |

## 5. Optical Interface

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                               | Symbol                     | Min. | Typ. | Max.  | Units | Notes |
|---|----------------------------|------|------|-------|-------|-------|
| Transmitter                             |                            |      |      |       |       |       |
| Center Wavelength                       | $\lambda_{\text{c}}$       | 1260 | 1310 | 1355  | nm    |       |
| Optical Spectral Width                  | $\Delta \lambda$           |      |      | 1     | nm    |       |
| Side Mode Suppression Ratio             | SMSR                       | 30   |      |       | dB    |       |
| Average Optical Power                   | P <sub>AVG</sub>           | -8.2 |      | 0.5   | dBm   |       |
| Optical Extinction Ratio                | ER                         | 3.5  |      |       | dB    |       |
| Average Launched Powe<br>(Laser Off)    | P <sub>OFF</sub>           |      |      | -30   | dBm   |       |
| Transmitter Eye Mask                    | Compliant with IEEE802.3ae |      |      |       |       |       |
| Receiver                                |                            |      |      |       |       |       |
| Center Wavelength                       | $\lambda_{\text{c}}$       | 1270 | 1310 | 1610  | nm    |       |
| Receiver Sensitivity<br>(Average power) | Sen                        |      |      | -14.4 | dBm   |       |
| Input Saturation Power (overload)       | Psat                       | 0.5  |      |       | dBm   |       |
| LOS Assert                              | LOSA                       | -30  |      |       | dBm   |       |
| LOS De-assert                           | LOSD                       |      |      | -17   | dBm   |       |
| LOS Hysteresis                          | LOSH                       | 0.5  |      |       | dB    |       |

Notes:

1. Launched power (avg.) is power coupled into a single mode fiber with master connector (BOL)
2. Measured with Light source 1310nm , ER=3.5dB; BER=<1e-12@10.3125Gbps, PRBS=2^31-1 NRZ

## 6. Electrical Interface

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.


| Parameters                                   | Symbol              | Min.                 | Typ. | Max.                 | Units            | Notes |
|--|---------------------|----------------------|------|----------------------|------------------|-------|
| Power Consumption                            | p                   |                      |      | 1.2                  | W                |       |
| <b>Transmitter</b>                           |                     |                      |      |                      |                  |       |
| Single-ended Input Voltage Tolerance         |                     | -0.3                 |      | 4.0                  | V                |       |
| AC Common Mode Input Voltage Tolerance (RMS) |                     | 15                   |      |                      | mV               |       |
| Differential Input Voltage Swing             | V <sub>in,pp</sub>  | 180                  |      | 700                  | mV <sub>pp</sub> |       |
| Differential Input Impedance                 | Z <sub>in</sub>     | 90                   | 100  | 110                  | Ohm              | 1     |
| Transmit Disable Assert Time                 |                     |                      |      | 10                   | us               |       |
| Transmit Disable Voltage                     | V <sub>dis</sub>    | V <sub>cc</sub> -1.3 |      | V <sub>cc</sub>      | V                |       |
| Transmit Enable Voltage                      | V <sub>en</sub>     | V <sub>ee</sub>      |      | V <sub>ee</sub> +0.8 | V                | 2     |
| <b>Receiver</b>                              |                     |                      |      |                      |                  |       |
| Differential Output Voltage Swing            | V <sub>out,pp</sub> | 300                  |      | 850                  | mV <sub>pp</sub> |       |
| Differential Output Impedance                | Z <sub>out</sub>    | 90                   | 100  | 110                  | Ohm              | 3     |
| Data output rise/fall time                   | Tr/Tf               | 28                   |      |                      | ps               | 4     |
| LOS Assert Voltage                           | V <sub>losH</sub>   | V <sub>cc</sub> -1.3 |      | V <sub>cc</sub>      | V                | 5     |
| LOS De-assert Voltage                        | V <sub>losL</sub>   | V <sub>ee</sub>      |      | V <sub>ee</sub> +0.8 | V                | 5     |

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

## 7. Outline Drawings

Dimensions are in millimeters. All dimensions are  $\pm 0.2\text{mm}$  unless otherwise specified. (Unit: mm)

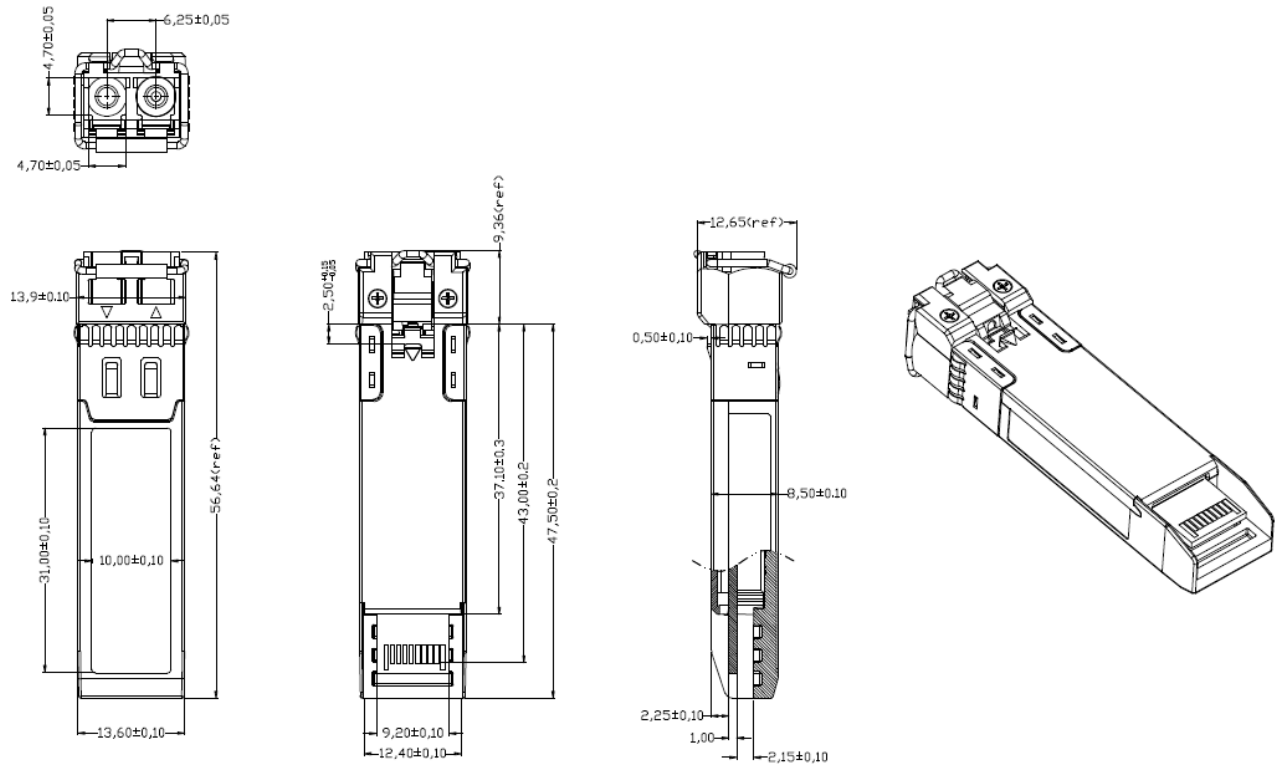

(\*) Bail color

| Part number     | Bail color |
|-----------------|------------|
| OD-BP0931SL1001 | Aqua blue  |

Figure7-1. Transceiver outline

## 8. Pin Configuration

| Pin No. | Symbol             | Name/Description   | Notes |
|---------|--------------------|--|-------|
| 1       | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1     |
| 2       | T <sub>FAULT</sub> | Transmitter Fault  | 2     |
| 3       | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.    | 3     |
| 4       | SDA                | 2-wire Serial Interface Data Line                              | 4     |
| 5       | SCL                | 2-wire Serial Interface Clock Line                             | 4     |
| 6       | MOD_ABS            | Module Absent. Grounded within the module                      | 4     |
| 7       | RS0                | No connection required(No function)                            |       |
| 8       | LOS                | Loss of Signal Indication. Logic 0 indicates normal operation. | 5     |
| 9       | RS1                | No connection required(No function)                            |       |
| 10      | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1     |
| 11      | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1     |
| 12      | RD-                | Receiver Inverted DATA out. AC Coupled                         |       |
| 13      | RD+                | Receiver Non-Inverted DATA Output. AC Coupled                  |       |
| 14      | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1     |
| 15      | V <sub>CCR</sub>   | Receiver Power Supply  |       |
| 16      | V <sub>CCT</sub>   | Transmitter Power Supply                                       |       |
| 17      | V <sub>EET</sub>   | Transmitter Ground   | 1     |
| 18      | TD+                | Transmitter Non-Inverted DATA in. AC Coupled                   |       |
| 19      | TD-                | Transmitter Inverted DATA in. AC Coupled                       |       |
| 20      | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1     |

### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an open collector/drain output, which should be pulled up with 4.7kohm – 10kohm resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>cc</sub>+0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. Should be pulled up with 4.7kohm – 10kohm on host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. LOS is open collector/drain output. It should be pulled up with 4.7kohm – 10kohm on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## 9. Digital Diagnostic Monitor Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode.

| Parameter                             | Unit  | Min.  | Max  | Notes                |
|---------------------------------------|-------|-------|------|----------------------|
| Temperature monitor absolute error    | deg.C | -3    | 3    | Over operating temp  |
| Supply voltage monitor absolute error | V     | -0.15 | 0.15 | Full operating range |
| RX power monitor absolute error       | dB    | -3    | 3    |                      |
| Bias current monitor                  | mA    | -10%  | +10% |                      |
| TX power monitor absolute error       | dB    | -3    | 3    |                      |

## 10. Ordering Information

| Part Number     | Fiber Optical Connector | Latch structure | Tx wavelength | Case Temperature |
|-----------------|-------------------------|-----------------|---------------|------------------|
| OD-CP0931SL1001 | LC                      | Bail Latch      | 1.31μm band   | -40 to +85 deg.C |

**- Revision history -**

| <b>Revision</b> | <b>Date</b>       | <b>Contents</b> |
|-----------------|-------------------|-----------------|
| P1E             | 29 September 2025 | -               |
|                 |                   |                 |
|                 |                   |                 |



**Areas of caution in the handling of laser diode products.**

- This product complies with IEC 60825-1:2014, IEC 60825-1:2007 and 21 CFR 1040.10, which correspond to the category “Class 1 Laser Product” under IEC regulation and “Class I Laser product” under FDA regulation.
- During operations, the laser diode discharges red beams and infrared beams invisible to the eye. Since it is very hazardous if these beams directly, or bypassing through a lens, get in one's eyes, please try to avoid this.
- Take proper Electrostatic-discharge (ESD) precautions while handling the device. The device is sensitive to ESD.
- May cause of damage if drop or subject to shock. This product includes optical parts.
- Caution-use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

**Areas of caution in handling GaAs.**

There are some products in our catalogue that use GaAs. Please strictly adhere to the caution items appearing below, in order to prevent dangerous situations.

- Do not put the product in your mouth.
- Do not turn the product into a vaporous or powdered form through burning, grinding or chemical processing.
- When disposing of the product, follow related laws, and your company's internal waste control regulations.

**Areas of caution in handling optical fiber products.**

- Be careful not to pierce your skins as the tips of optical fibers are extremely sharp. Especially you must attention in case of hazardous if they pierce one's eyes.
- Do not apply extreme stress to optical fiber, or it may cause deterioration of characteristics or disconnection. The force of pull should be less than 200gf, and a radius for bending should be larger than R30 mm
- Do not hold only optical fiber or module package, because extreme stress is easy to apply to the optical fiber edge of the module

In generally, failure occurs in electronic components with a certain probability. We at NEC work to improve the quality and reliability of industrial electronic components, but it is impossible to reduce such probability to zero. This being the case, users of NEC industrial electronic components are requested to provide redundant design, counterburning design, malfunction prevention design and other safety design to prevent failures that may cause possible accidents involving injuries of death, fire, social damages, etc.

NEC classifies the quality standard of its industrial electronic components into three categories, from the “Standard level” for lower quality upward to “Special level” and “specific level” for which customers are requested to designate their own quality assurance program. Respective quality levels are intended to being used for the following applications. In this connection, users considering to use NEC components for other than the “Standard level” application are always requested to contact an NEC sales representative in advance.

Standard level: For computers, O.A.(Office Automation) equipment, telecommunications equipment, measuring equipment, AV(Audio/Video) equipment, home electric appliances, machine tools, personal equipment and industrial robots.

Special level: Transportation machinery (automobiles, trains, ships, etc.), traffic signal equipment, disaster/crime prevention devices, various safety devices, and medical equipment not directly intended for life support.

Specific level: Aeronautical equipment, aerospace equipment, submarine relay equipment, nuclear control system, and medical equipment, devices or systems for life support.

NEC does not manufacture, as standard items, products recommendable to such “specific” applications as aerospace equipment, submarine relay equipment, nuclear control system and life-support medical equipment, which all require a very high levels of reliability. Customers planning to use our products for the above-mentioned applications or those planning to use our products of “standard” or “special” quality level for other application than intended by us, are requested to contact in addition, please note that NEC industrial electronic components listed in catalogs, data sheets, data books and other materials published by NEC without the indication of their quality level are all of the standard quality level.

●**Specifications and/or other content of the products carried in NEC publications are subject to change without notice.**

- Reproduction of this document is prohibited without the prior written permission of NEC.
- NEC shall not be liable for problems involving the industrial property right of third parties and arising from the use of NEC product(s) unless the problem directly related with the structure and/or method of manufacture of the products.
- These products are not designed for radiation resistance.
- Of the products carried by this catalog, those falling under the category of restricted cargo, etc. (or services) as stipulated by the Foreign Exchange and Foreign Trade Control Law require an export license from the Japanese government according to the same law before export to countries outside Japan.

**Contact information:**

NEC Corporation

Fiber Optic Devices Department

1131, Hinode, Abiko, Chiba 270-1198, Japan

Tel: +81-4-7185-7410 Fax: +81-4-7185-7925